

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_  
 DISTRIBUTOR: \_\_\_\_\_ CATALOGUE #: \_\_\_\_\_ TYPE: \_\_\_\_\_  
 DRAWN BY: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_ PO: \_\_\_\_\_



**STANPRO**

**SPEC SHEET**

**SLIM PROFILE WITH 5 CCT SELECTABLE  
 VARIETY OF DECORATIVE MOUNTING ACCESSORIES**

## FEATURES AND SPECIFICATIONS

### CONSTRUCTION

#### Physical Characteristics

- White polycarbonate housing  
 Note: The back of the housing for 5" is galvanized iron
- Available sizes: 5", 7", 9", and 12"
- CCT selectable switch is placed at the back of the housing
- Frosted PMMA lens and PS diffuser
- Standard beam angle is 110°

#### Mounting

- Surface installation is standard for luminaires, easy twist-lock
- For additional surface or suspended installations, see compatible mounting kit accessories


### PERFORMANCE DATA

- Available in 2 700/3 000/3 500/4 000/5 000 K selectable color temperature
- 80+ CRI
- Electrical ratings: 120 V
- Lumen output: 903 - 2 235 lm
- Phase cut (ELV / Triac) dimming standard
- Operating temperature: -10 °C to 45 °C (14 °F to 113 °F)

### COMPLIANCES

- cETLus listed for Canada and USA for damp locations
- Energy Star for 5", 7" and 9" luminaires
- Meets requirements of ICES-005 issue 5

## TECHNICAL DRAWINGS

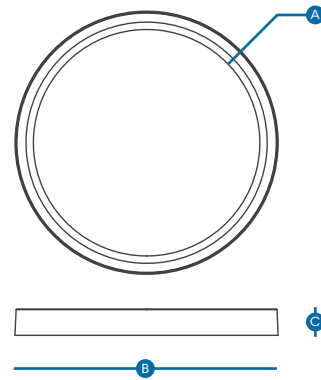

Size	A	B	C	Net Weight (lbs)
5"	4 3/8" (11.1 cm)	5 1/4" (13.5 cm)	3/4" (1.8 cm)	0.45
7"	6 1/8" (15.5 cm)	7 1/8" (18 cm)	3/4" (1.8 cm)	0.49
9"	7 7/8" (19.9 cm)	8 7/8" (22.5 cm)	3/4" (1.8 cm)	0.65
12"	10 7/8" (27.5 cm)	11 3/4" (30 cm)	3/4" (1.8 cm)	1.17

\* Please refer to the product web page to view detailed drawings by size.



5 CCT



5 YEARS  
WARRANTY



ICES  
005



Intertek



\* Only on 5" / 7" / 9"

## QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Lumen Output (lm) <sup>1,2,3</sup>	Efficacy (lm/W)	Watts (W)	Life L70 (hrs) <sup>4</sup>	Tested Hours LM-80 (hrs) <sup>4</sup>	Power Factor	Master Case Qty	UPC
<b>5"</b>										
	70672 <sup>2</sup>	CLCR5-R11W-A-5CWH	910	83	11	54 000	9 000	≥0.90	40	069549036505
<b>7"</b>										
	70673 <sup>2</sup>	CLCR7-R12W-A-5CWH	1 000	83	12	54 000	9 000	≥0.90	40	069549036512
<b>9"</b>										
	70674 <sup>2</sup>	CLCR9-R18W-A-5CWH	1 500	83	18	54 000	9 000	≥0.90	20	069549036529
<b>12"</b>										
	70675 <sup>1</sup>	CLCR12-R24W-A-5CWH	2 115	88	24	54 000	9 000	≥0.90	10	069549036536

<sup>1</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

<sup>3</sup> Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

<sup>4</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

## LUMEN SPECIFICATION TABLE

Order Code	Model Number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K		Default Programming
			Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	
<b>70672</b>	CLCR5-R11W-A-5CWH	11	903	82	926	84	961	87	970	88	939	85	3 000 K
<b>70673</b>	CLCR7-R12W-A-5CWH	12	1 006	84	1 019	85	1 048	87	1 075	90	1 040	87	3 000 K
<b>70674</b>	CLCR9-R18W-A-5CWH	18	1 470	82	1 511	84	1 583	88	1 598	89	1 511	84	3 000 K
<b>70675</b>	CLCR12-R24W-A-5CWH	24	2 021	84	2 115	88	2 205	92	2 235	93	2 178	91	3 000 K

## COMPATIBLE DIMMERS<sup>1</sup>

Brand	5"		7"		9"		12"	
	Model							
<b>Lutron</b>	HCL453P <sup>2</sup> , PD-6WCL, DVCL-153P <sup>2</sup> , CTCL-153P, AYCL-253P, DVELV-300P, SELV-300P, MACL-153P		HCL453P, PD-6WCL <sup>2</sup> , CTCL-153P, DVCL-253P, AYCL-253P, DVELV-300P, SELV-300P, MACL-153P		HCL453P, PD-6WCL, CTCL-153P, DVCL-253P, AYCL-253P, DVELV-300P, SELV-300P, MACL-153P		HCL453P, PD-6WCL, CTCL-153P, DVCL-253P, AYCL-253P, DVELV-300P, SELV-300P, MACL-153P	
<b>Cooper</b>	DAL06P, AAL06, SAL06P3		DAL06P, AAL06 <sup>2</sup> , SAL06P3		DAL06P, AAL06, SAL06P3		DAL06P, AAL06, SAL06P3	
<b>Leviton</b>	6615, IPL06, 6674, DSL06-1LZ, IPE04-1LZ, DDMX1		6615 <sup>2</sup> , IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1		6615, IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1		6615 <sup>2</sup> , IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1	
<b>Legrand</b>	-		RH730PTUTC		RH730PTUTC		RH730PTUTC	

Dimming range : 5 %-100 %

<sup>2</sup> 10 %-100 %

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

## ACCESSORIES\*

Order Code	Type	Finish	Diameter (in.)	Compatible With	Master Case Qty	Figure
70648	Clip-on trim	Matte black	5"	70672	40	A
70649	Clip-on trim	Satin nickel	5"	70672	40	B
70650	Clip-on trim	Matte black	7"	70673	40	A
70651	Clip-on trim	Satin nickel	7"	70673	40	B
70652	Clip-on trim	Matte black	9"	70674	40	A
70653	Clip-on trim	Satin nickel	9"	70674	40	B
70654	Clip-on trim	Matte black	12"	70675	20	A
70655	Clip-on trim	Satin nickel	12"	70675	20	B
70656	Decorative clip-on trim	Black/Gold	12"	70675	20	C
70657	Decorative clip-on trim	Black	12"	70675	20	D


\* Order separately.



## CYLINDER MOUNTING KIT ACCESSORIES<sup>1</sup>

Order Code	Model Number	Diameter (in.)	Cable Length (in.)	Finish	Compatible Luminaire (not included)	Master Case Qty	UPC	Figure
<b>Surface Cylinder</b>								
70658	5IN CYL SURFACE KIT BLACK FOR CLCR5	5 3/8	-	Black	70672	20	069549036369	A
70659	5IN CYL SURFACE KIT WHITE FOR CLCR5	5 3/8	-	White	70672	20	069549036376	A
<b>Suspended Individual Cylinder</b>								
70660	5IN CYL 10FT SUSP KIT BLACK FOR CLCR5	5 3/8	120	Black	70672	16	069549036383	B
70661	5IN CYL 10FT SUSP KIT WHITE FOR CLCR5	5 3/8	120	White	70672	16	069549036390	B
<b>Suspended Multi-Cylinder</b>								
70662	MULTI CYL 10FT SUSP KIT BLACK FOR CLCR5	5 3/8	120	Black	3x 70672	1	069549036406	C
70663	MULTI CYL 10FT SUSP KIT WHITE FOR CLCR5	5 3/8	120	White	3x 70672	1	069549036413	C

<sup>1</sup> Compatible luminaire is not included in mounting kit accessory and needs to be ordered separately.

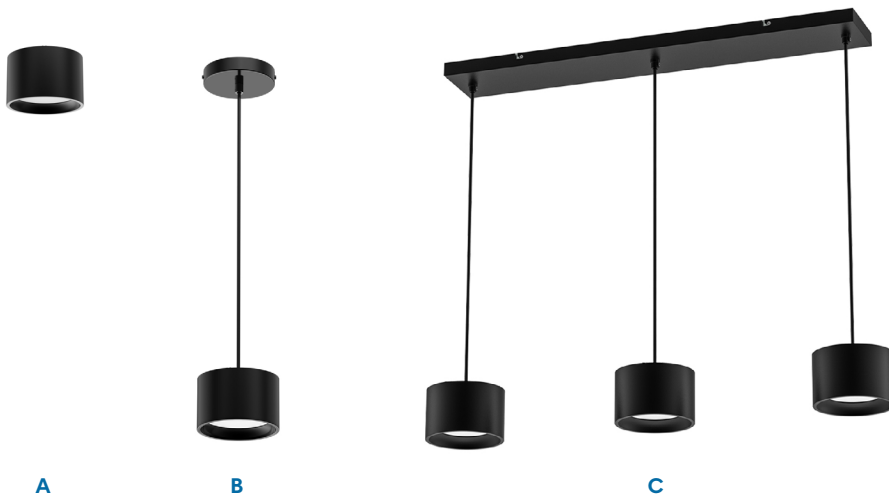

## PENDANT MOUNTING KIT ACCESSORIES<sup>1</sup>

Order Code	Model Number	Diameter (in.)	Cable Length (in.)	Finish	Compatible Luminaire (not included)	Master Case Qty	UPC	Figure
<b>Cone</b>								
<b>70664</b>	16IN CONE 10FT SUSP KIT BLACK FOR CLCR9	15 3/4	120	Black	70674	2	069549036420	A
<b>70665</b>	16IN CONE 10FT SUSP KIT WHITE FOR CLCR9	15 3/4	120	White	70674	2	069549036437	A
<b>70668</b>	19IN CONE 10FT SUSP KIT BLACK FOR CLCR12	19 1/8	120	Black	70675	2	069549036468	A
<b>70669</b>	19IN CONE 10FT SUSP KIT WHITE FOR CLCR12	19 1/8	120	White	70675	2	069549036475	A
<b>Dome</b>								
<b>70666</b>	15IN DOME 10FT SUSP KIT BLACK FOR CLCR9	14 5/8	120	Black	70674	2	069549036444	B
<b>70667</b>	15IN DOME 10FT SUSP KIT WHITE FOR CLCR9	14 5/8	120	White	70674	2	069549036451	B
<b>70670</b>	18IN DOME 10FT SUSP KIT BLACK FOR CLCR12	17 7/8	120	Black	70675	2	069549036482	B
<b>70671</b>	18IN DOME 10FT SUSP KIT WHITE FOR CLCR12	17 7/8	120	White	70675	2	069549036499	B

<sup>1</sup>Compatible luminaire is not included in mounting kit accessory and needs to be ordered separately.



A



B